





Absolute Pressure sensor MKS 50 –1000

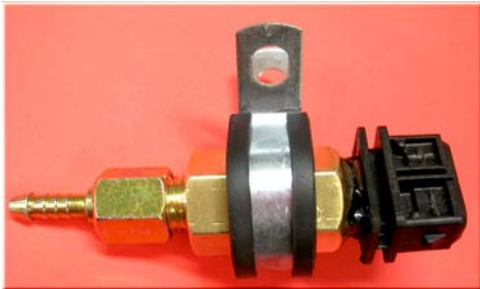

Features MKS 50 -1000

- ⊕ Pressure range 50 ... 1000 kPa
- ⊕ Temperature compensated
- ⊕ Fully calibrated
- ⊕ Fast ratiometric analog output technology
- ⊕ ESD-protection and short circuit protected
- ⊕ Inverse polarity protected up to 300mA supply current
- ⊕ Usable with air, fuel and oil
- ⊕ Body 19 mm hexagon, brass
- ⊕ Two versions with different lengths
- ⊕ 3 pole Bosch / Amp male connector
- ⊕ Available with M10X1.0 and M12X1.5 thread
- ⊕ Cone assembly also possible

Available MKS sensors: 10-115 kPa, 20-250 kPa,
15-380 kPa, 50-400 kPa, 50-600 kPa, 50-1000 kPa

Technical data MKS 50 - 1000

- | | |
|---|-----------------|
| ⊕ Pressure range | 50 ...1000 kPa |
| ⊕ Supply voltage | 4.75 ... 5.25 V |
| ⊕ Supply current at US = 5 V | 9 mA |
| ⊕ Output voltage 0.5 V @ 50 kPa ... 4.5 V @1000 kPa | |
| ⊕ Output load current | -1.0 ... 0.5 mA |
| ⊕ Lower limit at US = 5 V | 0.3 V |
| ⊕ Upper limit at US = 5 V | 4.7 V |
| ⊕ Response time | 1.0 ms |
| ⊕ Temperature range | -40 ... +125°C |
| ⊕ Weight | 60 g |
| ⊕ Length | 65 mm |

Cable version:

- ⊕ Flexible (-30°C) oil resistant cable, length ~200 mm
- ⊕ Body length 35 mm

- ⊕ All sensors: Pin 1 = gnd, Pin 2 = signal, Pin 3 = +5V

Manufacturer: MKS Autobusiness
Office: Jääkärintäti 7 A 2
00150 Helsinki, Finland

internet: www.mksautobusiness.fi
email: marko@mksautobusiness.fi
phone: +358 50 5173633